


DIFI Consortium
ESA Specifications Working Group
Status Update

Jeremy Turpin, Chair
Chief Scientist & Co-Founder, ALL.SPACE

October 6, 2025

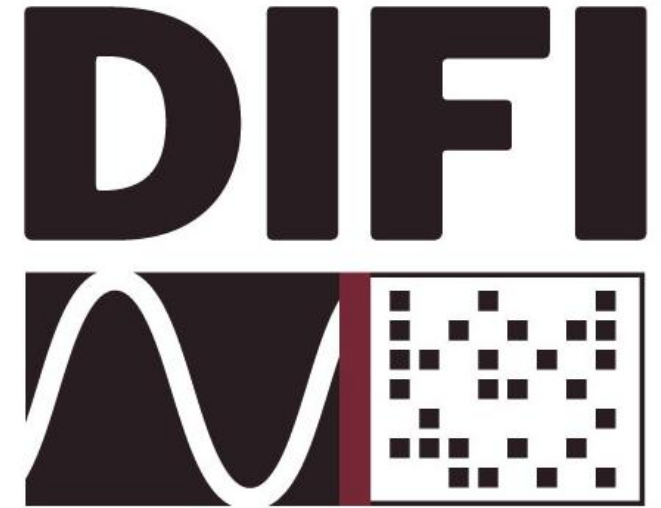

ESA WG Executive Summary



Chair: Jeremy Turpin, ALL.SPACE

Meeting Cadence: first Wednesday of each month, 11am Eastern

Working Group Participants:

- ALL.SPACE
- Apothym Technology Group
- Bascom Hunter Technologies
- Blue Halo
- Cobham SATCOM
- ETL Systems
- Geon Technologies
- Global Invacom
- Groundspace
- Keysight
- Kratos
- Kymeta
- Quintech
- Rohde & Schwarz
- Safran Data Systems
- SatixFy
- SES
- St Engineering iDirect
- Systems Technologies
- TEMIX Communications
- Thinkom
- Viasat
- Wavestream
- WORK Microwave

Differences for DIFI?



vs.



ESA vs. Gimbaled Differences

ESA

- Widely different technology and implementation
- Varying performance across field of view
- Limited field of view
- Dynamic and frequently changing performance capabilities during operation
- Often distributed amplification / receivers / frequency conversion (multiple LNA/LNB/HPA/BUC)
 - DIFI reference plane not necessarily well-defined
- Potential for multiple and even dynamic number of beams / links per antenna
- Potential for multiple points of digitization
- Very fast beam changes

Gimbaled

- Same performance throughout field of view (other than asymmetric antennas and spectral masks...)
- Single set of performance capabilities
- Single LNB / BUC
 - DIFI reference plane well-defined
- Single beam / link per antenna
- Single point of digitization
- Slow Beam changes (repointing)

Commonalities



- Waveform data from modem to antenna
- Need for communication of performance between terminal and modem

ESA WG Objectives



Objectives:

1. Identify the set of DIFI-supported use cases for ESA
 2. Identify the M&C features, capabilities, and data required to meet the use cases
 3. Propose the mechanism for implementing the ESA-specific M&C features
 - Many-to-Many relationship between modems, beams / streams, panels, and satellites
 - Rapid, synchronized beam / link control and IF data streams
 - Dynamic / configuration-dependent beam performance and behavior
 - Implemented through some combination of:
 - Existing OpenAMIP functionality
 - New Extensions to OpenAMIP (i.e., timing sync, stream ID)
 - Existing DIFI functionality
 - DIFI extension (i.e., OpenAMIP over DIFI, or equivalent DIFI command packets)
- Target: draft recommendations for consideration to the Standard WG in January, 2026

Participant's Goal



Ensure that the benefits provided by ESA (to and on behalf of end users, terminal manufacturers, network and satellite operators, and modem and waveform vendors) can be fully supported by DIFI, without simplifying assumptions that turn ESAs in practice into...poorly performing parabolic antennas.



ESA Physical Use Cases for DIFI (1/2)



One Modem Endpoint, One Antenna Endpoint

- Pointing direction / target, frequency, polarization, and Gain/Power/EIRP control required from modem to terminal, with time synchronization
- Angular pointing range, achievable power, achievable PSD capabilities required from terminal to modem
- Frequent power / modcod / frequency / satellite changes due to moving satellite / terminal

Multiple Modem Endpoints, One Antenna Endpoint

- Control/capabilities required as above
- Control over which modem is active and controlling the terminal at a moment in time
- Handover of the signal from the one antenna endpoint from one Modem endpoint to the other

Multiple (dynamic) modem endpoints, multiple (dynamic) antenna endpoints

- Dynamic number of endpoints over time
- Control over which modem is connected to which antenna endpoint (i.e., beam)
- Capabilities of each beam (antenna endpoint) may be different from each other
- Capabilities of each beam may change when other beams are configured
- Some combinations of modem-antenna endpoint pairings may need to operate independently from each other (i.e., LEO / GEO), requiring a high dynamic range between the signal levels of the two links.
- Other combinations of modem-antenna endpoint pairings may need to operate synchronously / cooperatively

ESA Physical Use Cases for DIFI (2/2)

Land, Maritime Mobility operation on small platforms

- Highly dynamic and unpredictable (on a second-by-second basis) power, blockage, satellite, and link environment
- Frequent changes in the number of beams, network connectivity, and antenna configuration
- Rapid changes in modem/antenna state, frequent link drop and re-acquisition

Aero ARINC 793-compliant installations

- One or more modems, one or more panels / antenna endpoint
- Separate fiber links per modem

Gateway many (static) modem endpoint to many (static) antenna endpoint ESA

- Gateway (LEO or otherwise)
- Highly Static modem endpoint-antenna endpoint assignment
- Frequent satellite changes, infrequent network changes.


M&C feature, capability, and data Req'ts



Topics COnsidered

6	Key Considerations.....	6
6.1	Reference Plane.....	6
6.2	Dynamic Antenna Performance and Available RF Power.....	8
6.3	Additional Fault Codes	8
7	Requirements.....	9
7.1	Security, Authorization, and Validation	9
7.2	Pointing and Tracking Prerequisites	11
7.3	System Controller to Antenna	13
7.4	Modem to Antenna Command and Control	14
7.5	Antenna Capability / Status Reporting.....	17

Security, Authorization, and Validation



- Neither DIFI nor OpenAMIP explicitly covers security
 - Replacing a point-point coax cable by point-point ethernet cable doesn't introduce concerns
 - Replacing a terminal with largely static configuration with a terminal with largely dynamic configuration (multiple modems, links, etc. all connected together) does introduce challenges.
 - M&C has safety and regulatory requirements for which protection of the communications channel may be desirable.



Pointing and Tracking


- Platform & Antenna position and orientation
- Time
- Frequency References



System Controller to Antenna

- Antenna properties
 - Number of beams
 - Status
 - Available modems and coverage regions
 - Available power and scan volume, antenna performance
- Modem/beam/link to DIFI Stream assignment
- DIFI configuration
- Regulatory Regime / configurations

Modem to Antenna Command & Control



- Per-Beam / Stream commands
- Execution / completion time / sample index for each command
- Frequency / polarization / tracking characteristics
- Target satellite / TLE / Handovers
- Target EIRP / EIRPSD
- Reference plane



Antenna Capability / Status Reporting



- Actual and Available EIRP / EIRP SD
- Blockage status
- Power draw & thermals
- Linearity assumptions
- Event-based status and error reporting



Next Steps

- Analysis and compare/contrast of existing protocols against the identified requirements
 - OpenAMIP 1.17
 - KAMP
 - Other “well-known” OpenAMIP extensions or similar protocols
 - DIFI 1.1/1.2.1/1.3 control/context plane
 - ...?
- Partition recommended implementation between DIFI and OpenAMIP
- Possible resulting recommendations
 - OpenAMIP messages over DIFI packets
 - OpenAMIP message / command extensions
 - DIFI 1.3.x/1.4 context / control extensions
- Target January 2026 to have draft recommendations

Conclusions

- The ESA WG has completed the first two objectives and is now progressing the third.
 - The ESA WG is working to establish recommendations for how to satisfy the M&C requirements identified in the second objective.
 - More participants in the WG are very welcome! Please join on the portal and join in the monthly calls.
-
- Questions?